






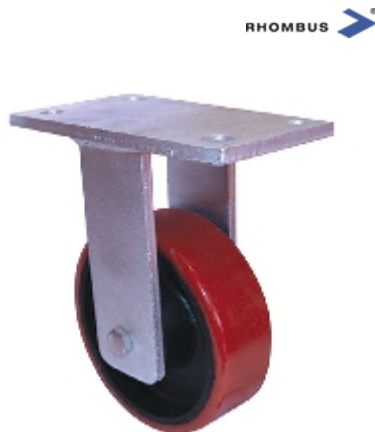


Fixed castor:

509a 18K250v ZPS

On request



## Technical data

Diameter		250 mm
Tread width		50 mm
Height		315 mm
Top plate dimensions		190x110 mm
Top plate hole diameter		17 mm
Dist. between holes		150x75 mm
Load capacity		1000 kg

## Technical description

heavy steel welded construction

zinc passivated

## Wheel

Polyurethane tyre red-orange (Shore A 95)

bonded on cast wheel centre

precision ball bearing